TOPGRÜN LIGHT

EN 795

Product description

Load-bearing anchor device for securing personal fall protection equipment (PPE).

Features/Benefits

• made from stainless steel and special geotextile
• easy to install
• does not penetrate the roof waterproofing
• can be used as a single anchor device or as a GREENLINE system support

Subfloor	flat roof (max. 5° inclination, parapet min. 10cm)
Fastening	surface load: dry, min. 80 kg/m²
Max. users	up to 2 people
Installation	in accordance with the assembly instruction



Approvals

• DIN EN 795:2012
• CEN/TS 16415:2017
When using these products, the relevant national legal requirements of the country in question must be observed!

Resistance to environmental factors

• Corrosion resistance class of the stainless steel components: CRC II
• Protect the geotextile from UV radiation within 30 days of installation
• Under normal installation conditions, the geotextile has a service life of at least 100 years

Impacts on the environment and health

The product does not constitute a dangerous substance within the meaning of the EU Dangerous Goods Regulation.

Safety and transport requirements

There are no specific safety or transport requirements to be observed.

Packaging | Storage conditions | Shelf life

• The product is packed in a box or on a pallet.
• Packages are not stackable.
• If stored in a dry place away from UV light, it has an indefinite shelf life.

Care and maintanance

Metal parts should be cleaned by wiping them with a cotton cloth. No other cleaning methods are permitted.

Disposal

The product is recyclable in line with the principles of the material cycle. Waste must be disposed of in accordance with local regulations.


System components | Accessories




GRÜN ZUB STREBENSET TOPGRÜN LIGHT E
Struts-set for end/corner bracing in the lifeline system

Hersteller / Werk: GRÜN GmbH Spezialmaschinenfabrik | Siegener Straße 81 - 83 | D -57234 Wilnsdorf-Niederdielfen
Tel./Phone: +49 (0) 2 71 - 39 88-0 | Fax: +49 (0) 2 71 - 39 88-159 | www.gruen-gmbh.de | info@gruen-gmbh.de

Product information

SET	Article number	Designation	Height	Weight	
	**60561500**	**EAE = single anchor device** **GRÜN EAE TOPGRÜN LIGHT**	**350 mm**	**10,85 kg**	
	**60561600**	**SYS = system support GREENLINE** **GRÜN SYS TOPGRÜN LIGHT E**	**350 mm**	**11,21 kg**	
	**60561700**	**GRÜN SYS TOPGRÜN LIGHT Z**	**350 mm**	**10,65 kg**	

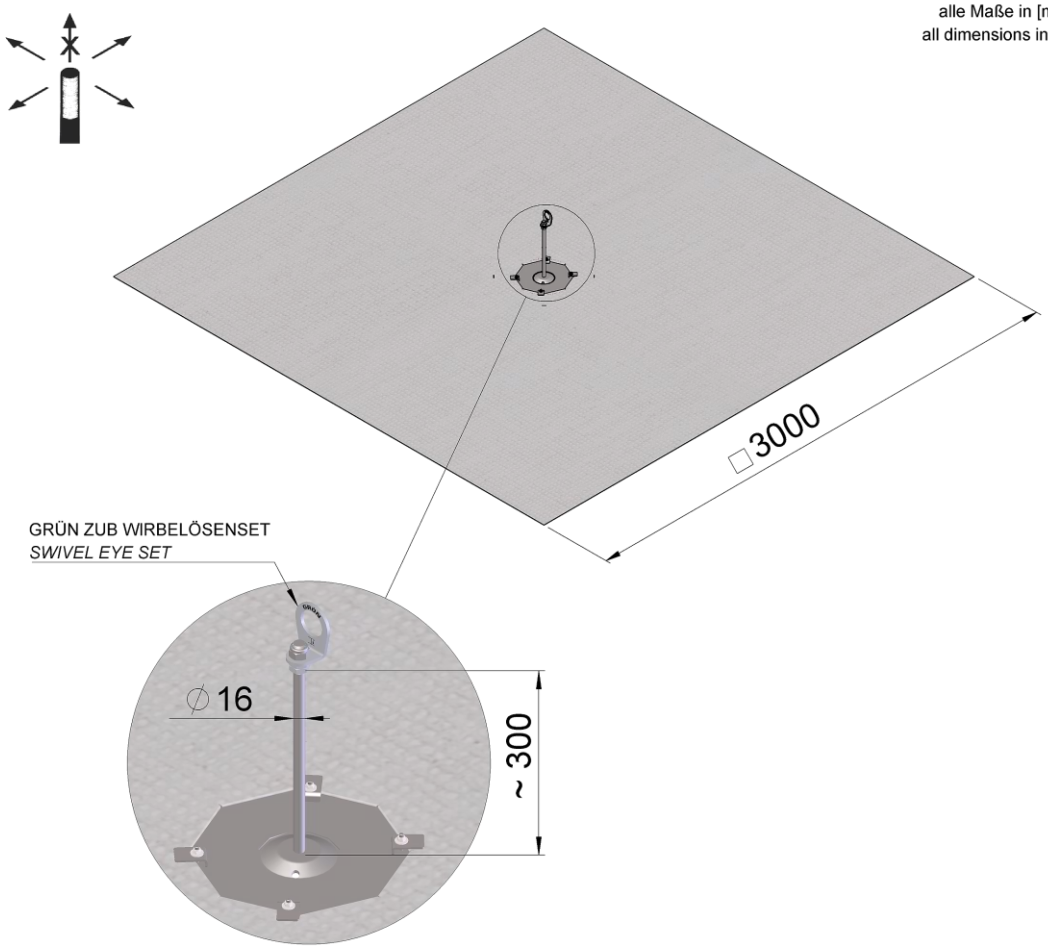

Note
Subject to errors, misprints and technical changes!
Version: PI_TOPGRÜN_LIGHT_en_26_11

Further information is available at:

Hersteller / Werk: GRÜN GmbH Spezialmaschinenfabrik | Siegener Straße 81 - 83 | D -57234 Wilnsdorf-Niederdielfen
Tel./Phone: +49 (0) 2 71 - 39 88-0 | Fax: +49 (0) 2 71 - 39 88-159 | www.gruen-gmbh.de | info@gruen-gmbh.de